


訂購代碼: BNS00M5

Technical drawing showing the front view of a vertical metal plate. The plate has a total height of 170 and a width of 120. It features a central vertical slot with 10 circular holes, each with a diameter of $\varnothing 10$. The holes are spaced 16 units apart, with a 30-unit gap at the bottom. The plate is mounted on a base with a thickness of 20. The base has a width of 13.5 and a central hole with a diameter of $\varnothing 11$. The plate is secured by 4x M25x1,5 bolts. The drawing includes dimension lines and labels for all specified measurements.

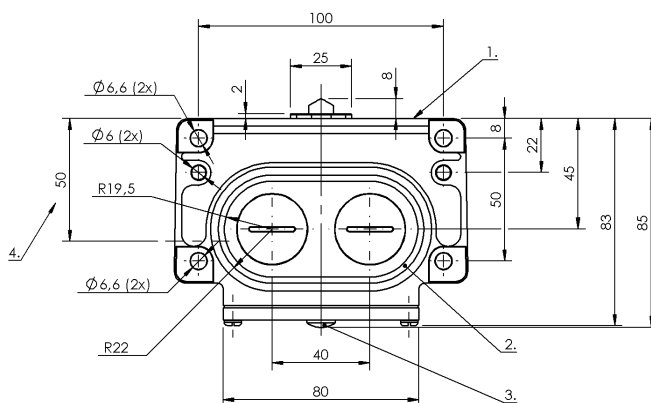

CE CCC WEEE UKCA

DIN 開關	DIN 43697
作用原理	1-8. 開關位置: 機械
基本標準	IEC 60947-5-1
規格	突動觸點
認證	CE UKCA CCC WEEE

B10d (EN ISO 13849-1) BSE 30.0 : 3 千萬電路循環

外殼材質	鋁, 陽極化
挺桿材料	1-8. 開關位置: 不鏽鋼 (1.4034)
表面保護, 外殼材料	陽極化
觸點材料	1-8. 開關位置: 純銀, 鍍金

功能顯示 1-8. 開關位置: FD - 6 - 60 V

連接方式 1-8. 開關位置: 螺栓連接

測量工作電壓 Ue	1-8. 開關位置: 250 V AC
連續電流	1-8. 開關位置: 6 A
開關功能, 機械	雙重斷路 電隔離 一個常開觸點和一個常閉觸點 二回路轉換觸點
開關頻率	1-8. 開關位置: 300/min

環境溫度	-5...85 °C
防護等級	IP67

Number of switching positions	8x 頂部 機械
使用壽命, 機械	1-8. 開關位置: 3 千萬次開關
凸輪至基準緣的距離	1-8. 開關位置: 4.50...5.00 mm
安裝	垂直
尺寸	120 x 170 x 85 mm
挺桿形狀	第 1 - 第 8 開關位置 : 頂部
挺桿距離, 第 1 開關位置	30 mm
法蘭, 套管	2x螺紋輸出端 M25
起步方向	縱向、平行於旋接面
起步速度	1-8. 開關位置: 40 m/min
開關元件	1-8. 開關位置: BSE 30.0
開關操作力	1-8. 開關位置: 20 N

重複性	1-8. 開關位置: ± 0.002 mm
開關位置距離	16 mm

凸輪開關

BNS 819-D08-D16-100-10-FD

訂購代碼: BNS00M5

BALLUFF

Wiring Diagrams (Schematic)

BSE 30.0

