

訂購代碼: BNS00HN


Technical drawing of a 3D-printed part, showing a side view with dimensions and annotations.

Dimensions:

- Overall width: 120
- Overall height: 105
- Top flange thickness: 14
- Distance from top flange to center of first hole: 50
- Distance between centers of holes: 16 (x4)
- Distance from center of last hole to bottom flange: 30
- Bottom flange thickness: 16

Annotations:

- $M25 \times 1,5$ (4x) - Thread specification for the holes.
- $\varnothing 10$ - Hole diameter.

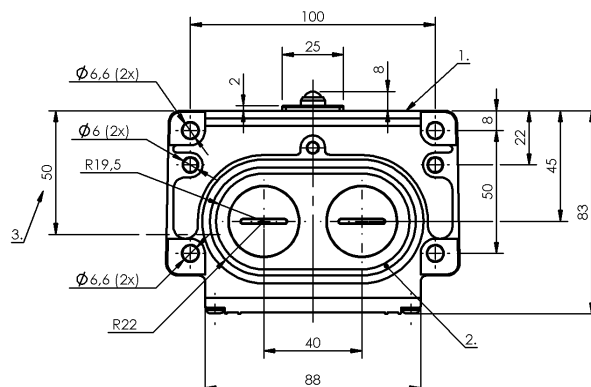

CE CCC UKCA

測量工作電壓 Ue	1-4. 開關位置: 250 V AC
連續電流	1-4. 開關位置: 6 A
開關功能, 機械	一個常開觸點和一個常閉觸點 電隔離 雙重斷路 二回路轉換觸點
開關頻率	1-4. 開關位置: 300/min

重複性 1-4. 開關位置: ± 0.002 mm

凸輪開關

BNS 819-D04-K16-100-10

訂購代碼: BNS00HN

BALLUFF

Wiring Diagrams (Schematic)

BSE 30.0

