


訂購代碼: BNS00K3

Technical drawing of a 4-hole vertical plate. The drawing shows a side view of the plate with four circular holes arranged vertically. The plate has a total height of 105 mm and a total width of 120 mm. The distance between the centers of the four holes is 50 mm. The distance from the top edge of the plate to the center of the top hole is 14 mm. The distance from the bottom edge of the plate to the center of the bottom hole is 30 mm. The distance between the centers of the two middle holes is 12 mm. The distance between the center of the top hole and the center of the second hole from the top is 12 mm. The distance between the center of the third hole from the top and the center of the bottom hole is 12 mm. The plate is labeled with "M25x1.5(4x)" indicating the thread size and quantity. The drawing also shows a central vertical line and a horizontal line passing through the center of the holes, with a dimension of 120 mm for the total width.

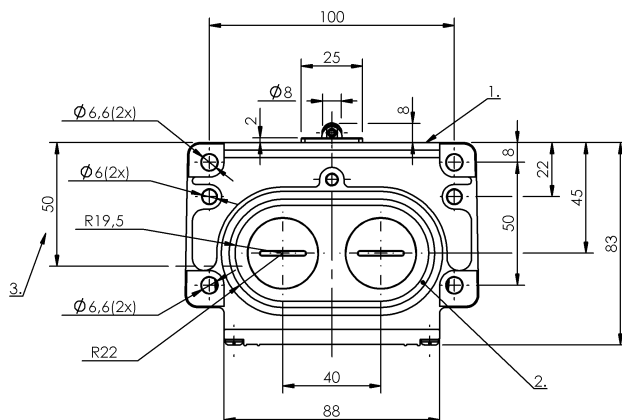

CE CCC UKCA

DIN 開關	DIN 43697
作用原理	1-5. 開關位置: 機械
基本標準	IEC 60947-5-1
規格	突動觸點
認證	CE UKCA CCC WEEE

B10d (EN ISO 13849-1) BSE 30.0 : 3 千萬電路循環

外殼材質	鋁, 陽極化
挺桿材料	1-5. 開關位置: 不鏽鋼 (1.4034)
表面保護, 外殼材料	陽極化
觸點材料	1-5. 開關位置: 純銀, 鍍金

功能顯示 1-5. 開關位置: 無

連接方式 1-5. 開關位置: 螺栓連接

測量工作電壓 Ue	1-5. 開關位置: 250 V AC
連續電流	1-5. 開關位置: 6 A
開關功能, 機械	雙重斷路 電隔離 一個常開觸點和一個常閉觸點 二回路轉換觸點
開關頻率	1-5. 開關位置: 300/min

Number of switching positions	5x 滾動軸承 機械
使用壽命, 機械	1-5. 開關位置: 3 千萬次開關
凸輪至基準緣的距離	1-5. 開關位置: 4.50...5.00 mm
安裝	垂直
尺寸	120 x 105 x 83 mm
槓桿形狀	第 1 - 第 5 開關位置: 滾動軸承
槓桿距離, 第 1 開關位置	30 mm
法蘭, 套管	2x 螺紋輸出端 M25
起步方向	縱向、平行於旋接面
起步速度	1-5. 開關位置: 120 m/min
開關元件	1-5. 開關位置: BSE 30.0
開關操作力	1-5. 開關位置: 20 N

環境溫度	-5...85 °C
防護等級	IP67

重複性	1-5. 開關位置: ± 0.01 mm
開關位置距離	12 mm

凸輪開關

BNS 819-D05-L12-100-10

訂購代碼: BNS00K3

BALLUFF

Wiring Diagrams (Schematic)

BSE 30.0

